

## **Installation Instructions**

### Supadeep Bath



**(tc)**  
bathrooms

## Your Cast Iron Bath

The manufacturing process used in the enamel of a cast iron bath involves a thick coat of powder enamel being fused to the surface of a red hot bath. Evidence of this is reflected in individual characteristics inherent in every bath, such as dimples, a degree of surface ripple and small black specks.

These are quite normal and will not affect the life of your bath.

## Recommendations

- Clean regularly with a non-abrasive cleaner.
- If in doubt, contact your showroom or customer services prior to installation.
- This bath should be dried after each use.
- Avoid dripping taps.

## Installation Instructions

### Before you begin


- Caution: Risk of personal injury or product damage, Cast Iron Baths are heavy, be prudent and get help when it comes to lift up the bathtub.
- To ensure that this product is installed correctly, please read the following instructions very carefully, before the installation of the feet.
- We strongly advise that the installation shall be done by a qualified plumber.
- Also be sure that your installation conforms to local codes.

### Recommended Tools and Materials:

- Adjustable wrench and Cardboard sheet

### Feet Installation

- Turn the bathtub upside down in a cardboard sheet to avoid any damage on the enameled surface, this operation needs to be done in a very careful manner.
- Slot the bolt thru the lugs and the feet, and afterwards connect the feet to the lugs by means of the nut and washer. Note that in first place the nut must be hand tighten.
- Now you can adjust the feet to its exact location on the lug, for that you can use the opening on feet. When you've reached the exact concordance between feet and lug, you must tighten the nut very firmly, for that you can use an adjustable wrench.
- Carefully place the bath in its normal position.
- All of the feet have leveling bolts on their lower extremity; you can use them to get a more exact assembly.

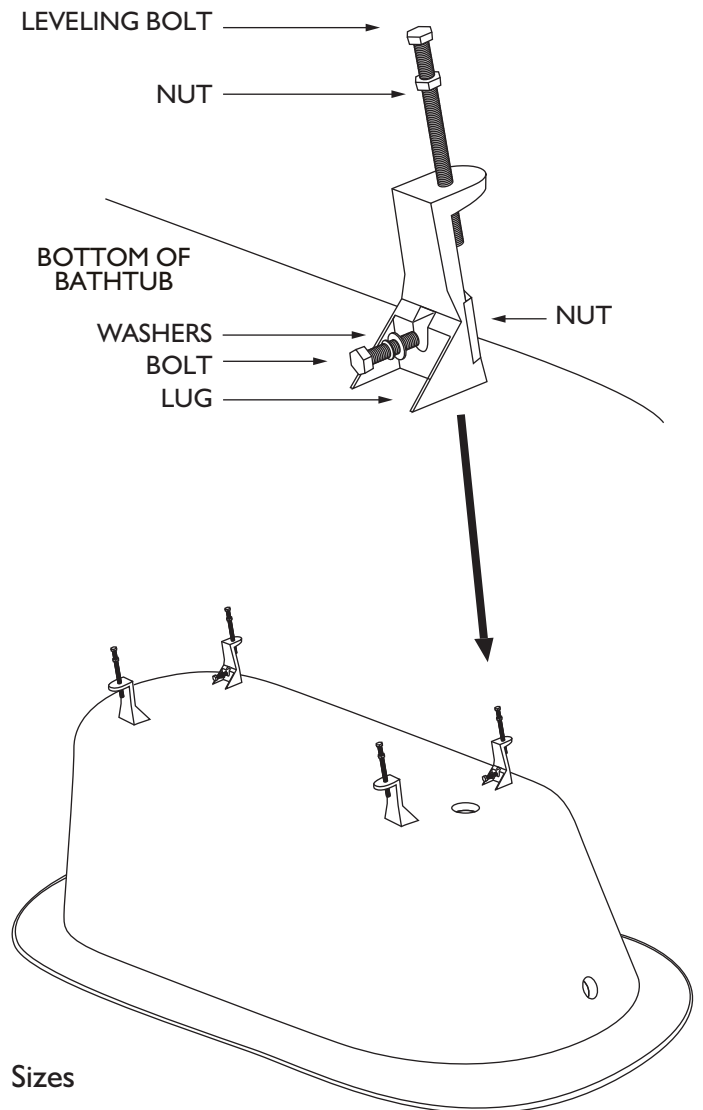

### Sizes

1700mm x 750mm

1800mm x 810mm

Only available with 2 tap holes